





SKU: BV5078

-  Lockable Brass Ball Valve EN331 British Gas Approved
-  Abschließbare Messingkugelhahn EN331 British Gas Zugelassen
-  Aprobado latón con llave de bola válvula EN331 British Gas
-  Brass verrouillable Ball Valve EN331 British Gas Approuvé

**Valves**<sup>™</sup>  
O N L I N E

- 1/2 " - 1" Brass ball valve fitted with key locking device
- 1/2 "- 1" Messing-Kugelhahn mit Schlüsselverriegelungseinrichtung
- 1/2 " - 1" válvula de bola de latón equipados con dispositivo de bloqueo clave
- 1/2 " - 1" Vanne à bille en laiton équipé de dispositif de verrouillage du clavier



**Lockable Brass Ball Valve, Yellow Butterfly Lever. F x F BSPP**



**Description**

Full bore screwed BSPP female x female ball valve, with Yellow PVC Coated Butterfly handle.

Fitted with Key Locking Device.

1/2" PN64, 3/4" - 1" PN40.

Temperature Range -20°C to 150°C.



**Beschreibung**

Voller Durchgang geschraubt BSPP weiblichen x weibliche Kugelhahn, mit gelbem PVC beschichtete Schmetterling Griff

Ausgestattet mit Key -Zuhaltung .

1/2 " PN64 , 3/4 " - . 1 " PN40

Temperaturbereich -20 ° C bis 150 ° C .



**Descripción**

Paso total atornillado hembra BSPP x válvula de bola femenina , con PVC Amarillo mango mariposa recubierto .

Equipado con dispositivo de bloqueo de

claves. 1/2 " PN64 , 3/4 " - . 1 " PN40

Rango de temperatura de -20°C a 150°C .



**Description**

Passage intégral vissé BSPP femelle x vanne à boisseau sphérique femelle, avec PVC jaune poignée papillon couché .

Equipé de dispositif de verrouillage Key . 1/2

" PN64 , 3/4 " - . 1 " PN40 Plage de

température de -20°C à 150°C .

- EN331 BG Certified
- WRAS Approved
- Full Bore
- Butterfly Lever with Key Locking Device

**Description**





Brass nickel plated , full bore ball valve – certified to EN331 British Gas and WRAS approved. Screwed BSPP Female with PTFE Seats, NBR/Viton stem O Rings, Anti-Blow Out Stem. Yellow Butterfly Lever and key locking device

**Typical Applications** For Isolation of industrial and domestic process. Heating, Hot water, Cold water, oil, fuel, gas and air pipe systems



**BSI Gas Approved**

**WRAS**  
APPROVED  
PRODUCT

-  Lockable Brass Ball Valve EN331 British Gas Approved
-  Abschließbare Messingkugelventil EN331 British Gas Zugelassen
-  Aprobado latón con llave de bola válvula EN331 British Gas
-  Brass verrouillable Ball Valve EN331 British Gas Approuvé


## 2/2 Brass Ball Valve with Locking Operator

### Description

Brass Nickel Plated , Full Bore Ball Valve - EN331 British Gas and WRAS approved, screwed BSPP Female, PTFE Seats, NBR/Viton stem O Rings, Anti-Blow Out Stem. Yellow butterfly handle **Fitted with Key Locking Device.**

**Typical Applications** - For Isolation of industrial and domestic process. Heating, Hot water, Cold water, oil, fuel, gas and air pipe systems

**Options** - There are many options with regard to operators and threads:- Butterfly Lever, Lockable Lever Neck Extensions (good if lagging is required) Male x Female Thread, High pressure.

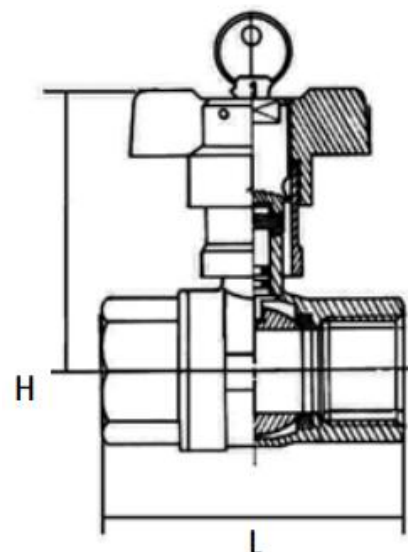

### Dimensions

DN	Size	H	L	Kg
15	1/2"	74	59	0.44
20	3/4"	80	69	0.54
25	1"	83	83	0.8

### Material List

Body	Brass Nickel Plated
Ball	Brass
Seats	PTFE
Stem	Brass
Stem O-Ring	Viton/NBR
Handle	Aluminium

### Pressure / Temperature Ratings

Max Pressure	1/4" 1/2" PN64
	3/4" to 1" PN40
Temperature Gas	-20°C to 70°C
Temperature Fluid	-20°C to 150°C

**BSI Gas Approved**



**WRAS**  
APPROVED  
PRODUCT